

MONUMENT RECORD
State of Indiana - County of Monroe

Section: 21

Township: 7 North


Range: 1 East

Corner ID: Polk I-15


Monument Description & Remarks: 3" Brass Disk stamped, "T7N-R1E, S.20/S.21 1/4, 1978 S.0143". Survey Sign 3ft above ground at pt. C

References On File: Andrew J. Sobiech description of monument, Certified Land Corner Restoration (1974), on file in Surveyor Office

RECOVERY TIE DRAWING
Field Book 42 Page No. 28

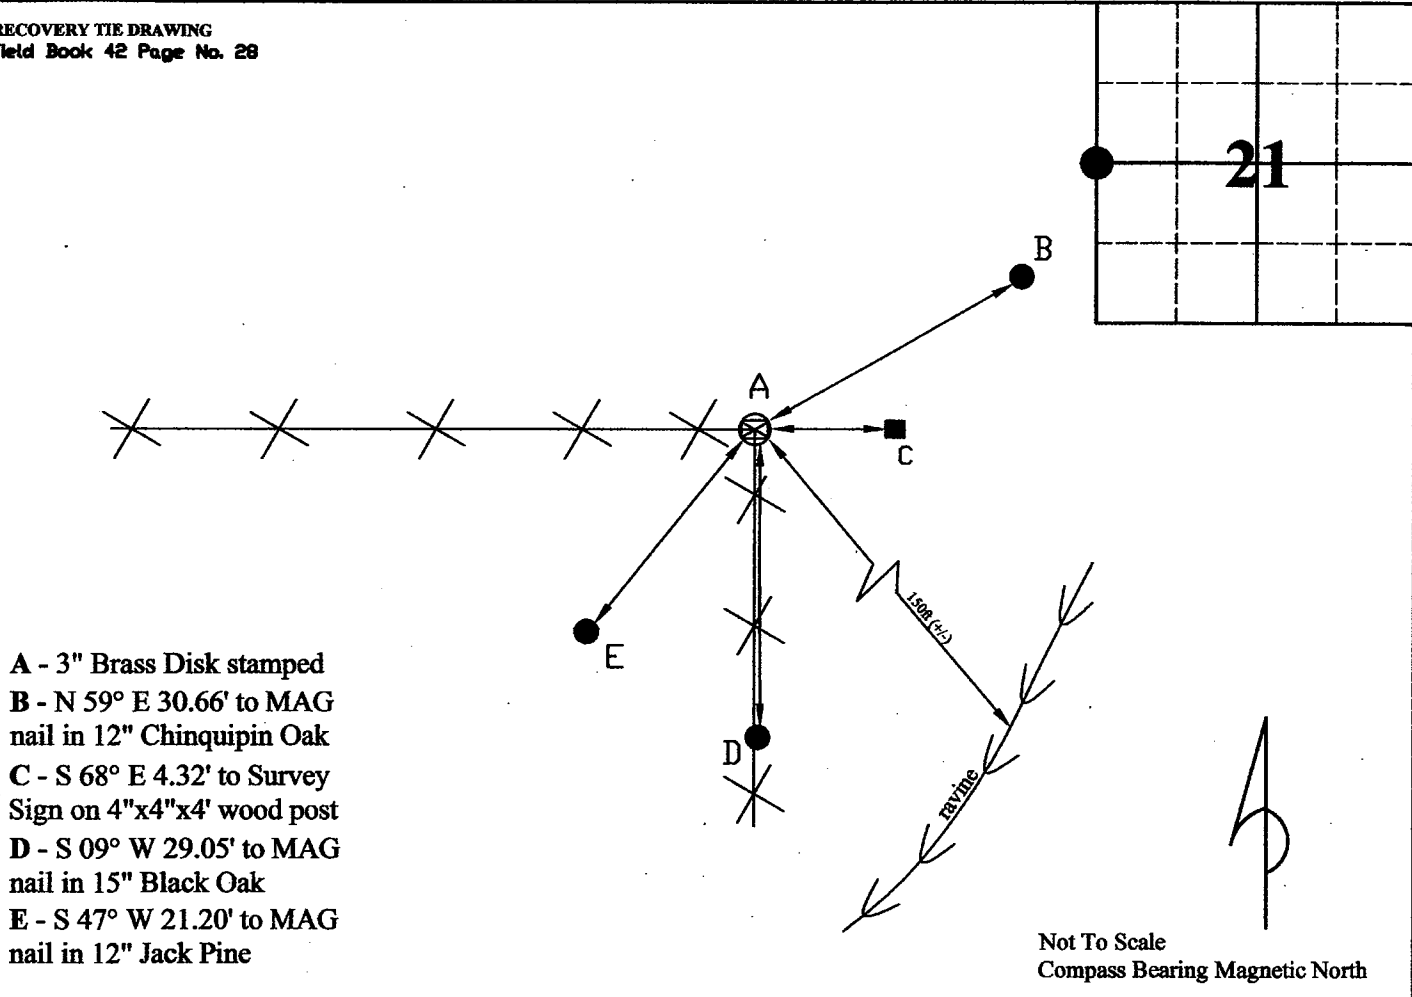


I, Kevin P. Enright, Monroe County Surveyor, hereby certify that this document was prepared under my direction in accordance with the provisions of section 36-2-12-11 of the Indiana Code, and the above data is given under my hand and seal this 18th day of March, 2009.

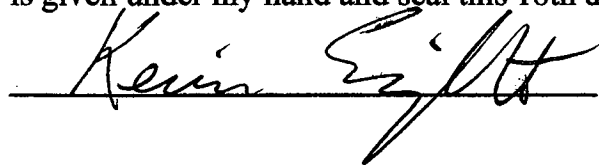

Administered by the Monroe County Surveyor Review Board

Date: 4-7-2009

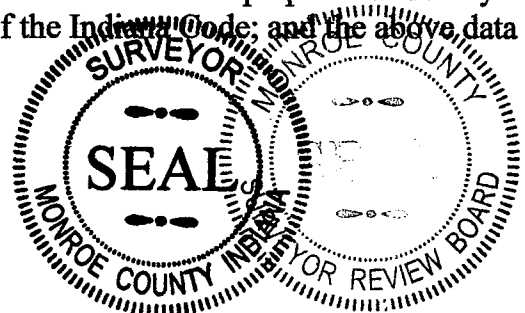

RECORDED
A.M. P.M. 1:55

Polk. I15

MAR 18 1985

168717

✓ *Virginia P. Adams*
✓ RECORDER MONROE CO., IND ✓

BOOK 155 PAGE 529

R9-5680-14 (5/1/64) H. C. MILLER CO., MILWAUKEE 447802

CERTIFIED LAND CORNER RESTORATION

State of Indiana }
County of Monroe } ss.

I Andrew J. Sobiech, do hereby certify that on the 13 day of May, 1974,
I found evidence of the 1/4 Section corner of Section 20 - 21
Township 7 North, Range 1 East, Second Principal Meridian, as described
hereon; and that from this evidence I established a new monument and accessories as described hereon to per-
petuate the original location of this corner:

Description of original monument and accessories and subsequent restorations:

Original monument was	Subsequent survey by Buskirk, Co. Surveyor, filed
a wood post set in 1814:	in Monroe County.
Original bearing trees:	His bearing trees were:
W. Oak B. Oak	Hickory Sycamore
10" 10"	3" 6"
S 72° E S 63° W	N 72° E S 65° W
14 lks 18 lks	10½ lks 28 lks


Description of corner evidence found:

Found stone 5"x4" 10" above ground at the Northeast corner of an open field.
The stone is marked with + on top.

Description of monument and accessories I established to perpetuate the original location of this corner:

I left the stone in place and made the following new witnesses:

4"x4" Post	Scarlett Oak	Scarlett Oak	Scarlett Oak
East	10" DBH	12" DBH	11" DBH
4.9 feet	N 30° E	N 44° W	S 48° W
	15.0 feet	12.2 feet	13.2 feet

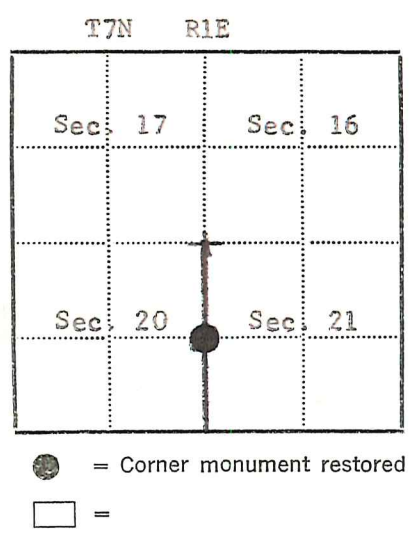

Field Assistant
Resident witnesses Henry Deaton - Tom Getz - U.S.F.S.
Dated at Brownstown Indiana, this 7 day of May
1975.
Signature Andrew J. Sobiech Title Land Surveyor
(County Surveyor, Registered Land Surveyor, or other duly authorized official)
Surveyors Registration No. S-0143
Office of _____ County of _____
I hereby certify that the within instrument was filed in this office for record
on the _____ day of _____ 19_____, and was filed in Book
No. _____ Page No. _____ of County Records.

Signature _____ Title _____

Township 7 North, Range 1 East, Section 20, 21, Index No. P-9, Page No. _____
This instrument was prepared by Andrew J. Sobiech

CERTIFIED LAND CORNER RESTORATION

State of Indiana

County of Monroe

SS.

I, Andrew J. Sobiech, do hereby certify that on the 14 day of May, 1974, I found evidence of the Section corner of Sections 20-21-28-29 Township 7 North, Range 1 East, Second Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner:

Description of original monument and accessories and subsequent restorations:

Original monument was a wood post set in 1814.

Original Witnesses:

W. Oak	B. Oak
30" DBH	18"
S 81° E	N 61° W
9 lks	9 lks

Description of corner evidence found:

Found sandstone 2'x10" 4" high, marked with a + on top, and lying 12' east of fence corner. The fences run from the north and west and intersect in a 10" DBH hickory at the north edge of a pine plantation.

Description of monument and accessories I established to perpetuate the original location of this corner:

I left the stone in place and made the following new witnesses:

4"x4" Post	Elm	Red Pine	Red Pine
S 30° W	7" DBH	13" DBH	13" DBH
8.6 feet	N 75° E	S 40° W	S 40° E
	20.8 feet	20.6 feet	15.0 feet

T7N

R1E

Field Assistant

Henry Deaton - U.S. Forest Service

~~Resident witnesses~~

Index No. P-9
(Alphabetical - Numerical)


LAND CORNER RECORD (RECTANGULAR SURVEYS)

R9-7150-4 (Rev. 6/13/67)
GPO 806-924

T. 7N R. 1E Mer. N.F. 40031er County Monroe State Ind.
1/4 section Corner common to sections 20, 21, and

EXISTING SURVEYS

Original Government Survey		Original Evidence Found	
Year surveyed <u>1814</u>		Year of search _____	By _____
Original monument <u>Wood Post</u> (Wood post, stone, pile of stones, pipe, etc.)		Monument found _____	
Bearing Trees		Original Bearing Trees Found	
Species <u>W. Oak</u> <u>B. Oak</u>		Species _____	
Diameter <u>10"</u> <u>10"</u>		Diameter _____	
Bearing <u>S 72 E</u> <u>S 63 W</u>		Bearing _____	
Distance <u>14 lks</u> <u>18 lks</u>		Distance _____	
Subsequent Corner Restoration		Evidence of Subsequent Corner Restoration Found	
Year surveyed <u>1861</u>	By <u>J. Buskirk</u>	Year of search <u>1973</u>	By <u>H. Dexton</u>
Where filed or recorded <u>Monroe Co Eng. Office 1937</u>		<u>Found stone 5" x 4" x 10" above ground at the edge of field on south facing slope</u>	
Monument <u>Stone</u> (Original, concrete post, iron rod, etc.)		<u>Stone is marked + 1/4</u>	
Bearing Trees, Reference Objects		Bearing Trees, Reference Objects	
Species <u>Hickory</u> <u>Sycamore</u>		<u>Area has been burned over in the past no bearing trees found.</u>	
Diameter <u>3"</u> <u>6"</u>			
Bearing <u>N 72 E</u> <u>S 65 W</u>			
Distance <u>10 1/2 lks</u> <u>28 lks</u>			



Sketch

○ Corner ■ F.S. Land

Relation of Evidence to Record Features Along Section Lines

Section line to sections 20-21
Object OK 10 lks running West
Record distance 21 ch. N.
Measured distance _____

Other Evidence

Describe evidence of use and occupation such as roads, fences, clearings, timber cutting lines, plantations, etc. Cite source of testimony if any.

Field

Perpetuation Record

Monument and accessories established. Include brief description of area.

Need to leave stone, make new witness
done 5-13-74

At time of search:

1. Did you have the record description?
Yes ☒ No _____

2. How was search area located?

Pacing, chaining, photos, maps,
etc. photos maps
phone to East

3. Man hours spent in search 2 hr

4. Do you think additional search might recover evidence? Yes _____ No _____

5. Signature Harry Dexton

Certified corner restoration certificate prepared: Yes _____ No _____
Filed in county records at _____ Date _____ County Document No. _____
Identified on aerial photo No. _____ Which is filed at _____